

Dimension

H: 245 mm
W: 80 mm
D: 28 mm

Microswitches 2 pc NO
IP class: IP67
Nominal rated current from:
0,1 A - 10 A/250 V AC
Lowest rated current 1mA/4 V DC




Material:
Alu.6060-T6
POM Plastic

Cleaning:

The elbow switch can be
cleaned with all commonly
used detergents.

Hole pattern:

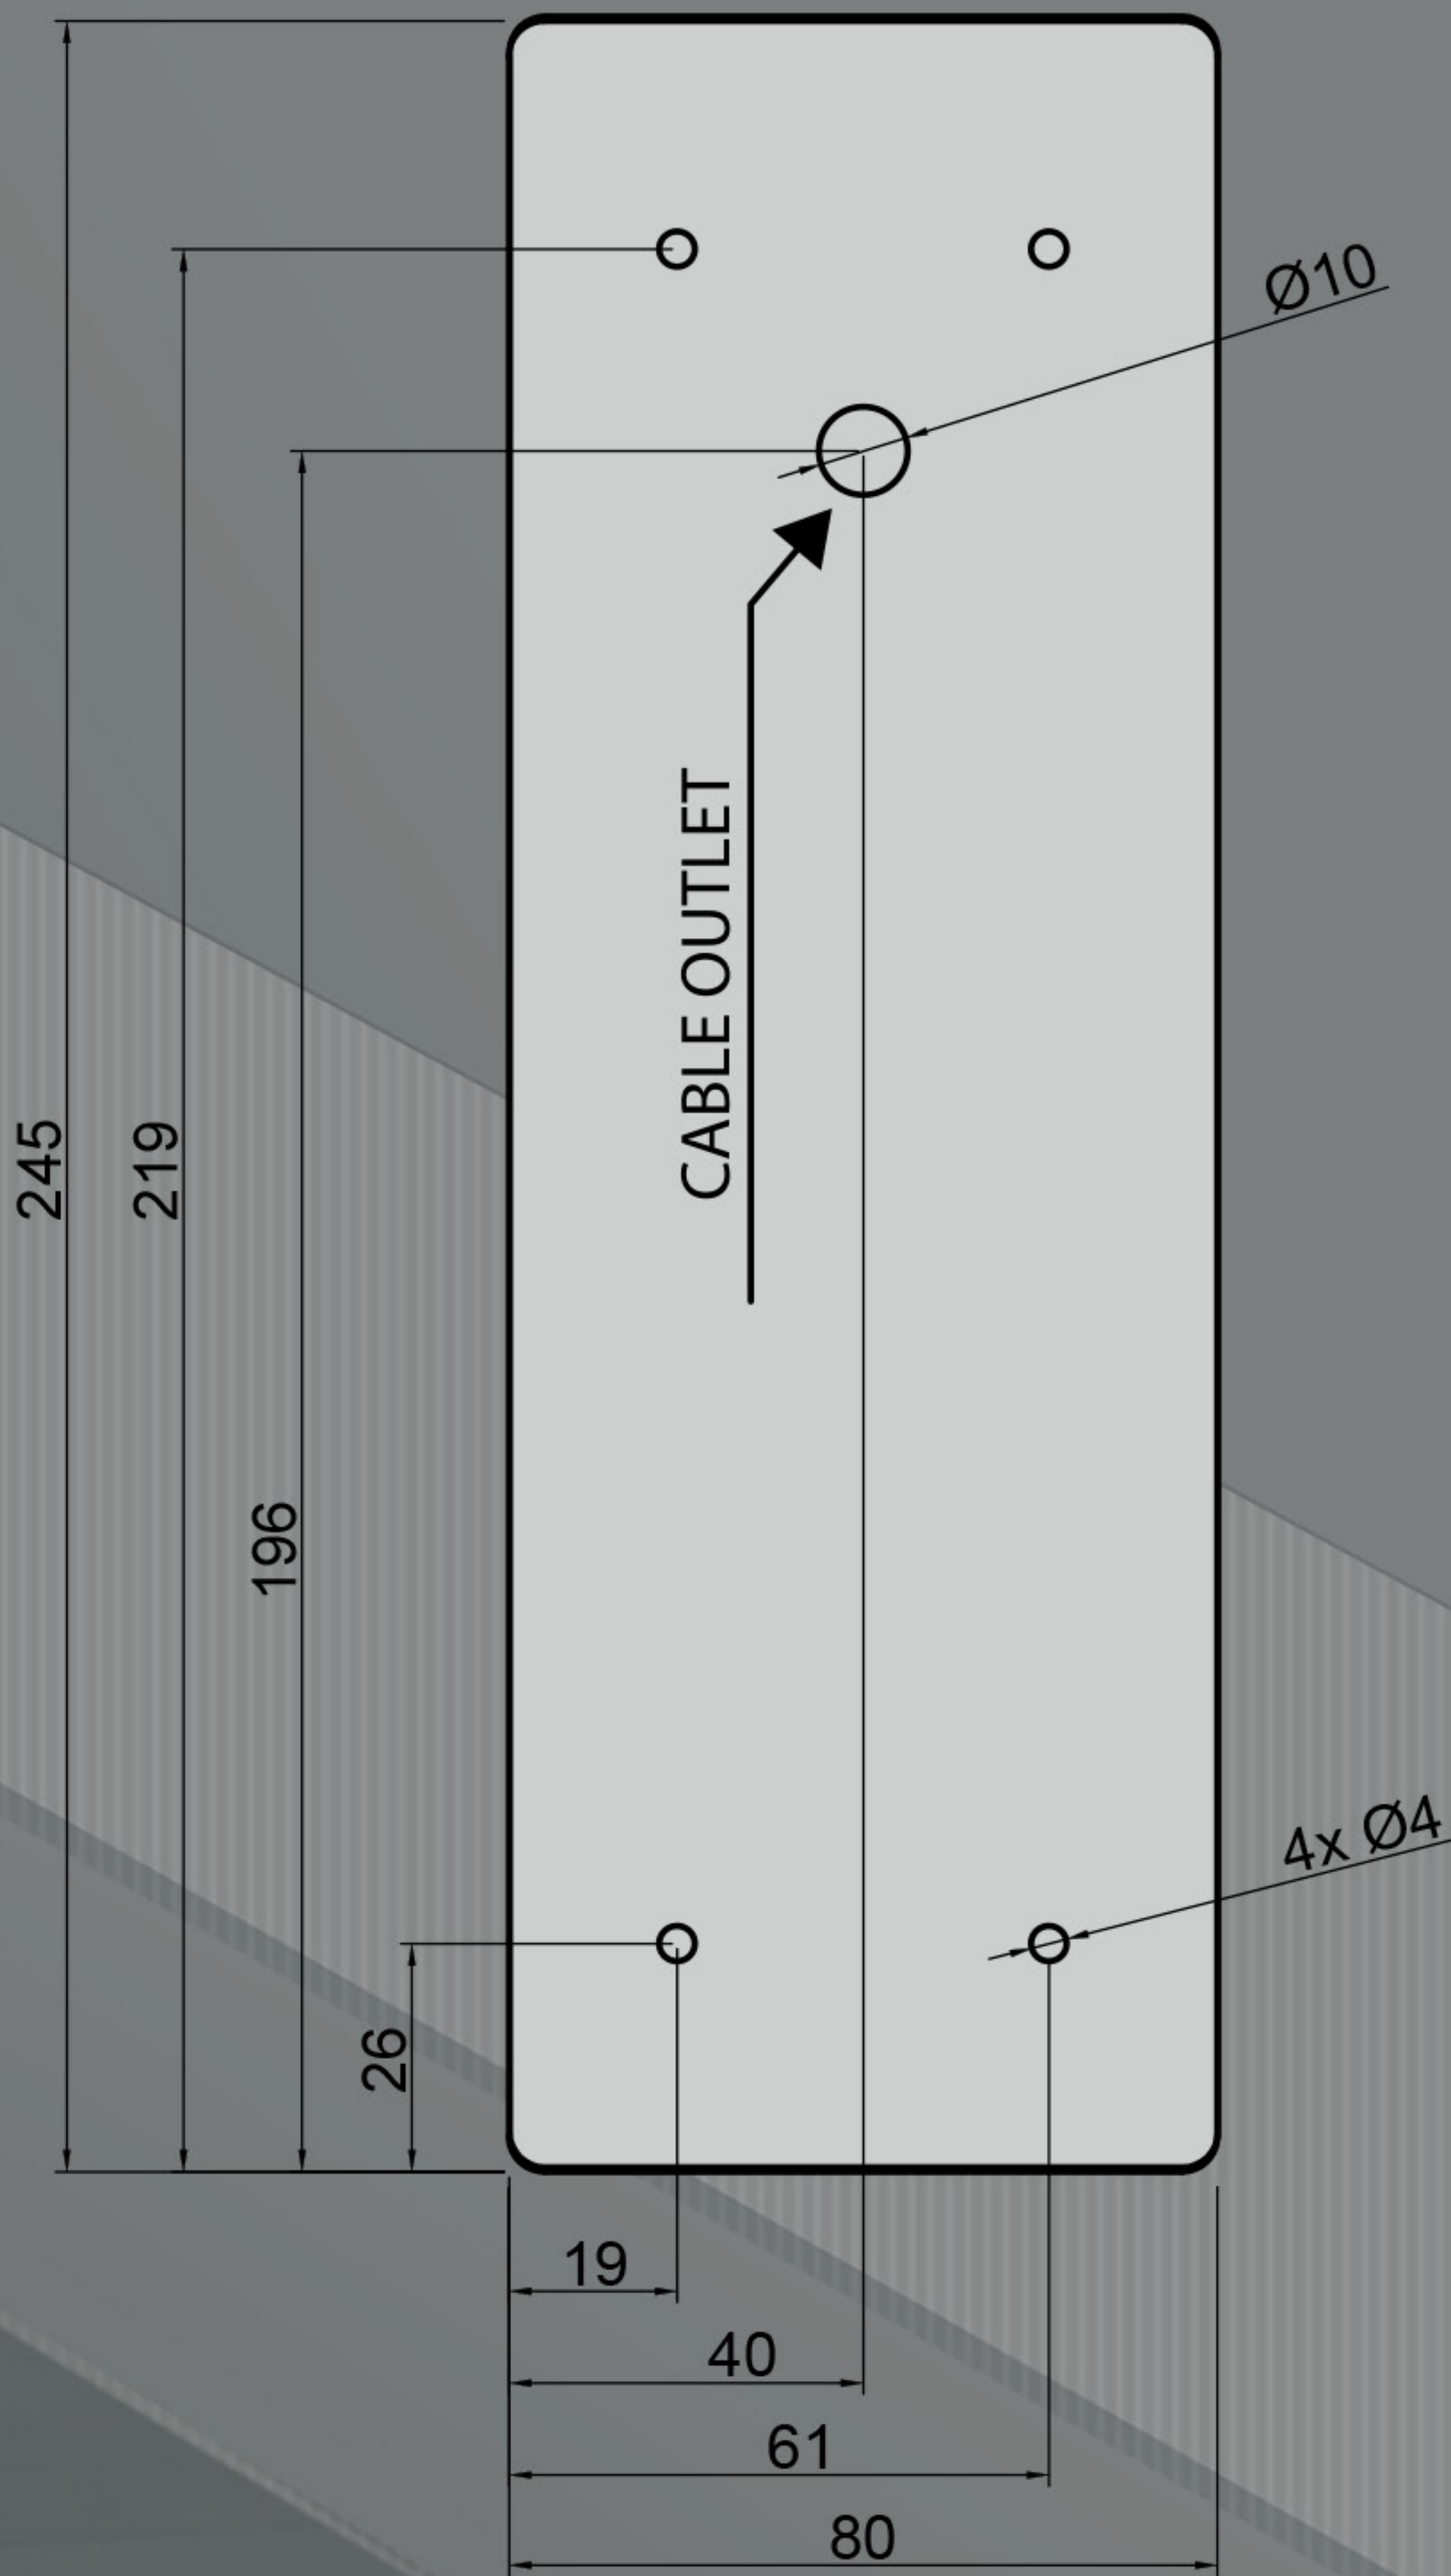

Optional:

Can be ordered with:
* Microswitch with Change
over functionality, NO/NC
* Radio transmitter for
wireless installation
* Control unit with 2 relays
* Universal symbols:

1. Door



2. Wheelchair



3. Lift



* Contrast lines



NOTE

For outdoor installation, drill a 3 mm hole in the bottom endcap to drain out any moisture.