

**Mått**

H: 241 mm  
B: 80 mm  
D: 23 mm  
Vikt: 310g

**LED**

Nominell märkström:  
24 V 3mA DC  
  
Lägsta märkström:  
19 V 1 mA DC


Mikrobrytare 2 st standard  
(1 st NO + 1 st NO/NC)  
IP klass: IP67  
Nominell märkström från:  
12 V Resisitiv 6A  
Induktiv L/R 5 ms 6A  
24 V Resisitiv 6A  
Induktiv L/R 5 ms 5A  
Lägsta märkström 1mA/4 V DC

**Material:**

Chassi: Alu.6060-T6  
Endcaps: POM Plast  
(Acetalplast)  
BVD av SundaHus: A

**Rengöring:**

Kontakten går att rengöra  
med alla förekommande  
rengöringsmedel.

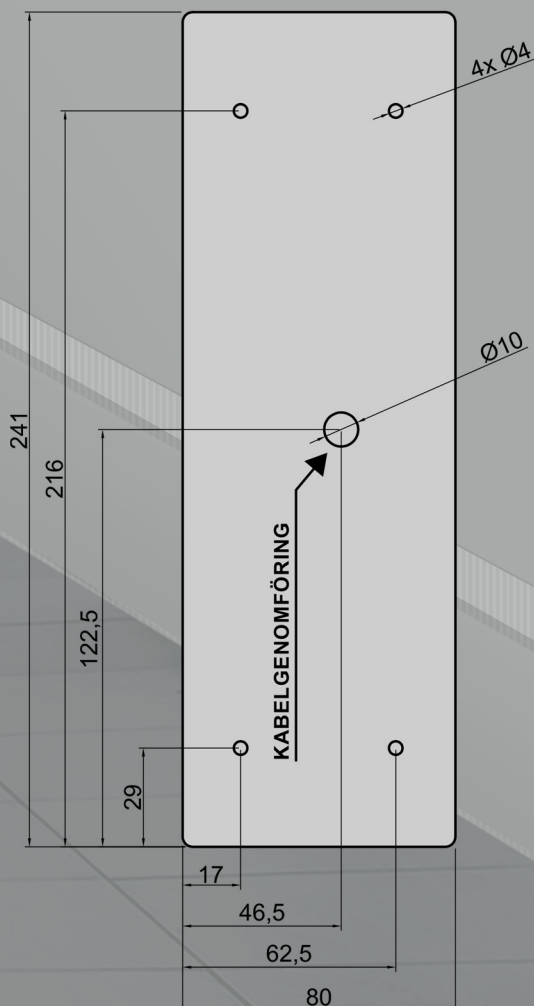**Hålbildsritning:****Tillval:**

Går att beställa med:

- \* Radiostyrning
- \* Styrenhet med 2 utgångar
- \* Universella symboler:

1. Dörrsymbol



2. Rullstolsymbol



3. Hissymbol




\* Kontrastränder

**OBS.**

Vid utomhusmontage bör ett 3 mm dräneringshål  
borras i den nedre gaveln på armbågskontakten  
för att dränera ut eventuell fukt.

## Assembly and installation.

1. Disassemble the lower endcap by screwing out both screws.
2. Slide out the aluminum lid.
3. Connect the electric wiring (12-24 V) to the connection terminal.
4. Fixate the aluminum core with assembly screws and washers.
5. Assemble the lower end cap.
6. Place back the lid by setting its hinge on the core's C channel and turning it counterclockwise (see illustration).

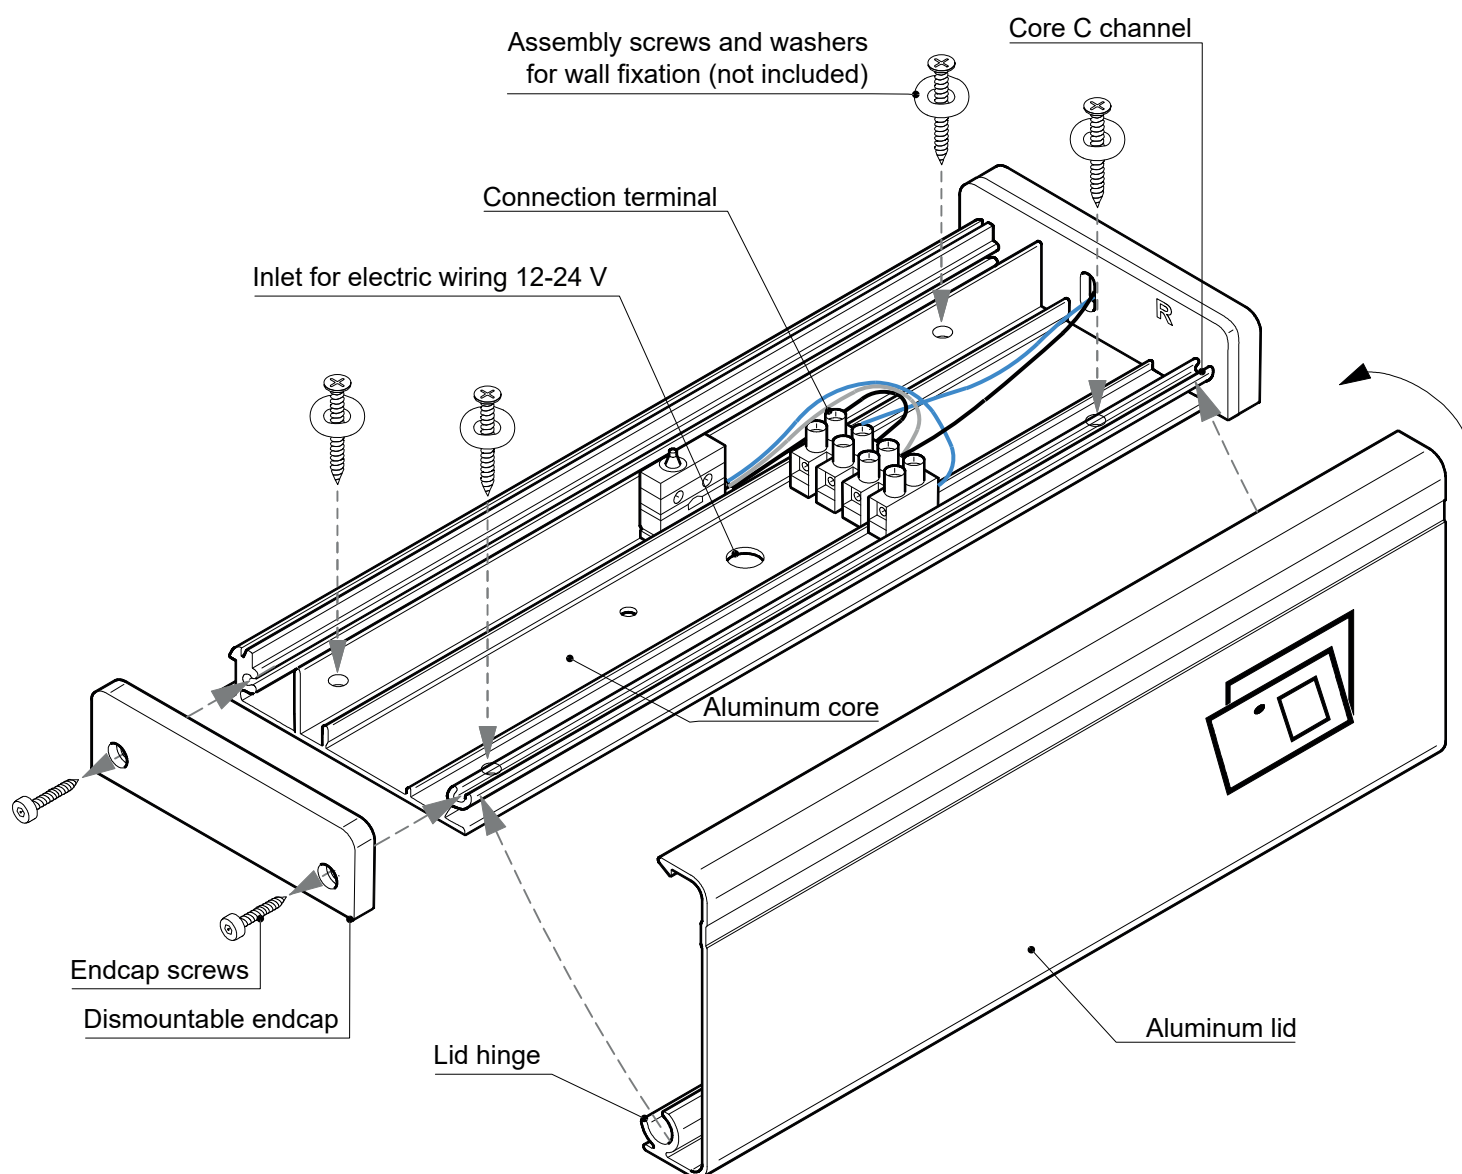

Click [here](#) to go to the product JCK 277.