

Mått

H: 241 mm
B: 80 mm
D: 23 mm
Vikt: 310g

LED


Nominell märkström:
24 V 3mA DC

Lägsta märkström:
19 V 1 mA DC

Mikrobrytare 2 st standard
(1 st NO + 1 st NO/NC)
IP klass: IP67
Nominell märkström från:
12 V Resisitiv 6A
Induktiv L/R 5 ms 6A
24 V Resisitiv 6A
Induktiv L/R 5 ms 5A
Lägsta märkström 1mA/4 V DC

*Material:**Chassi: Alu.6060-T6**Endcaps: POM Plast (Acetalplast)**BVD av SundaHus: A**Rengöring:*

*Kontakten går att rengöra
med alla förekommande
rengöringsmedel.*

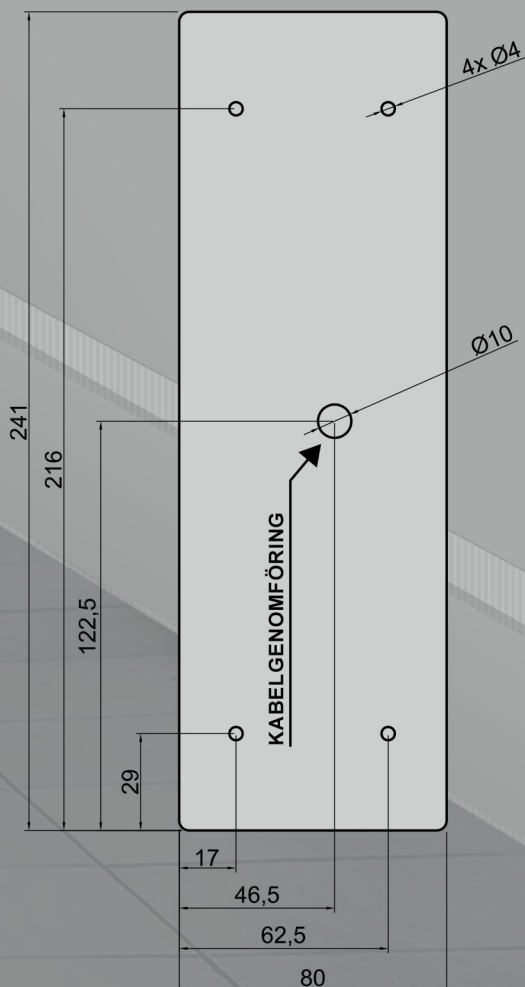Hålbildsritning:**Tillval:**

Går att beställa med:

- * Radiostyrning
- * Styrenhet med 2 utgångar
- * Universella symboler:

1. Dörrsymbol



2. Rullstolsymbol



3. Hissymbol




* Kontrastränder

**OBS.**

Vid utomhusmontage bör ett 3 mm dräneringshål
borras i den nedre gaveln på armbågskontakten
för att dränera ut eventuell fukt.

Assembly and installation.

1. Disassemble the lower endcap by screwing out both screws.
2. Slide out the aluminum lid.
3. Connect the electric wiring (12-24 V) to the connection terminal.
4. Fixate the aluminum core with assembly screws and washers.
5. Assemble the lower end cap.
6. Place back the lid by setting its hinge on the core's C channel and turning it counterclockwise (see illustration).

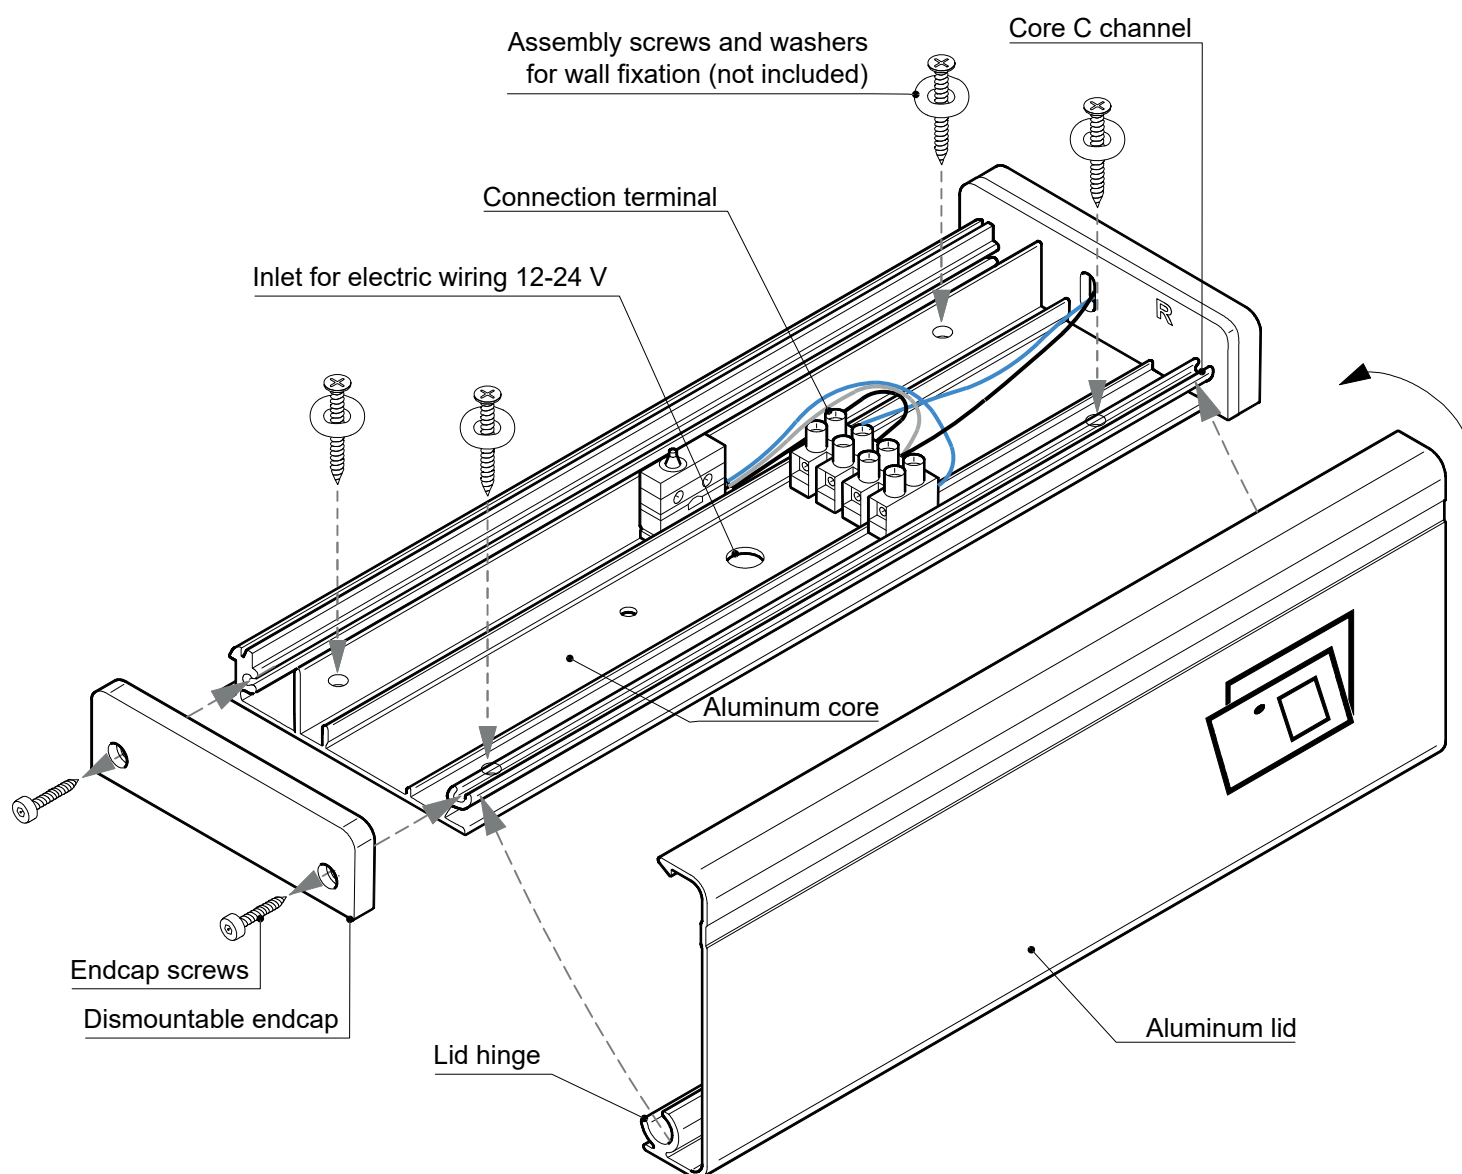

Click [here](#) to go to the product JCK 267.