

**Dimension**

H: 245 mm  
W: 50 mm  
D: 23 mm

Microswitch 1 pc NO  
IP class: IP67  
Nominal rated current from:  
0,1 A - 10 A/250 V AC  
Lowest rated current 1mA/4 V DC



*Material:*  
Alu.6060-T6  
POM Plastic (Acetal)

*Cleaning:*  
The elbow switch can be cleaned with all commonly used detergents.

**Optional:**

- Can be ordered with:
- \* 2 Microswitches
  - \* Microswitch with Change over functionality, NO/NC
  - \* Radio transmitter for wireless installation
  - \* Control unit with 2 relays
  - \* Universal symbols:


1. Door



2. Wheelchair




3. Lift

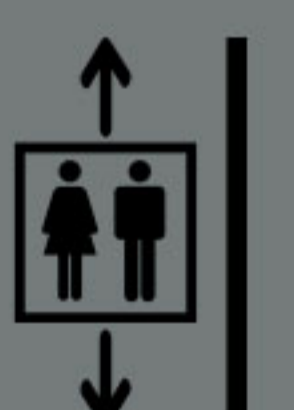

\* Contrast lines



**Hole pattern:**

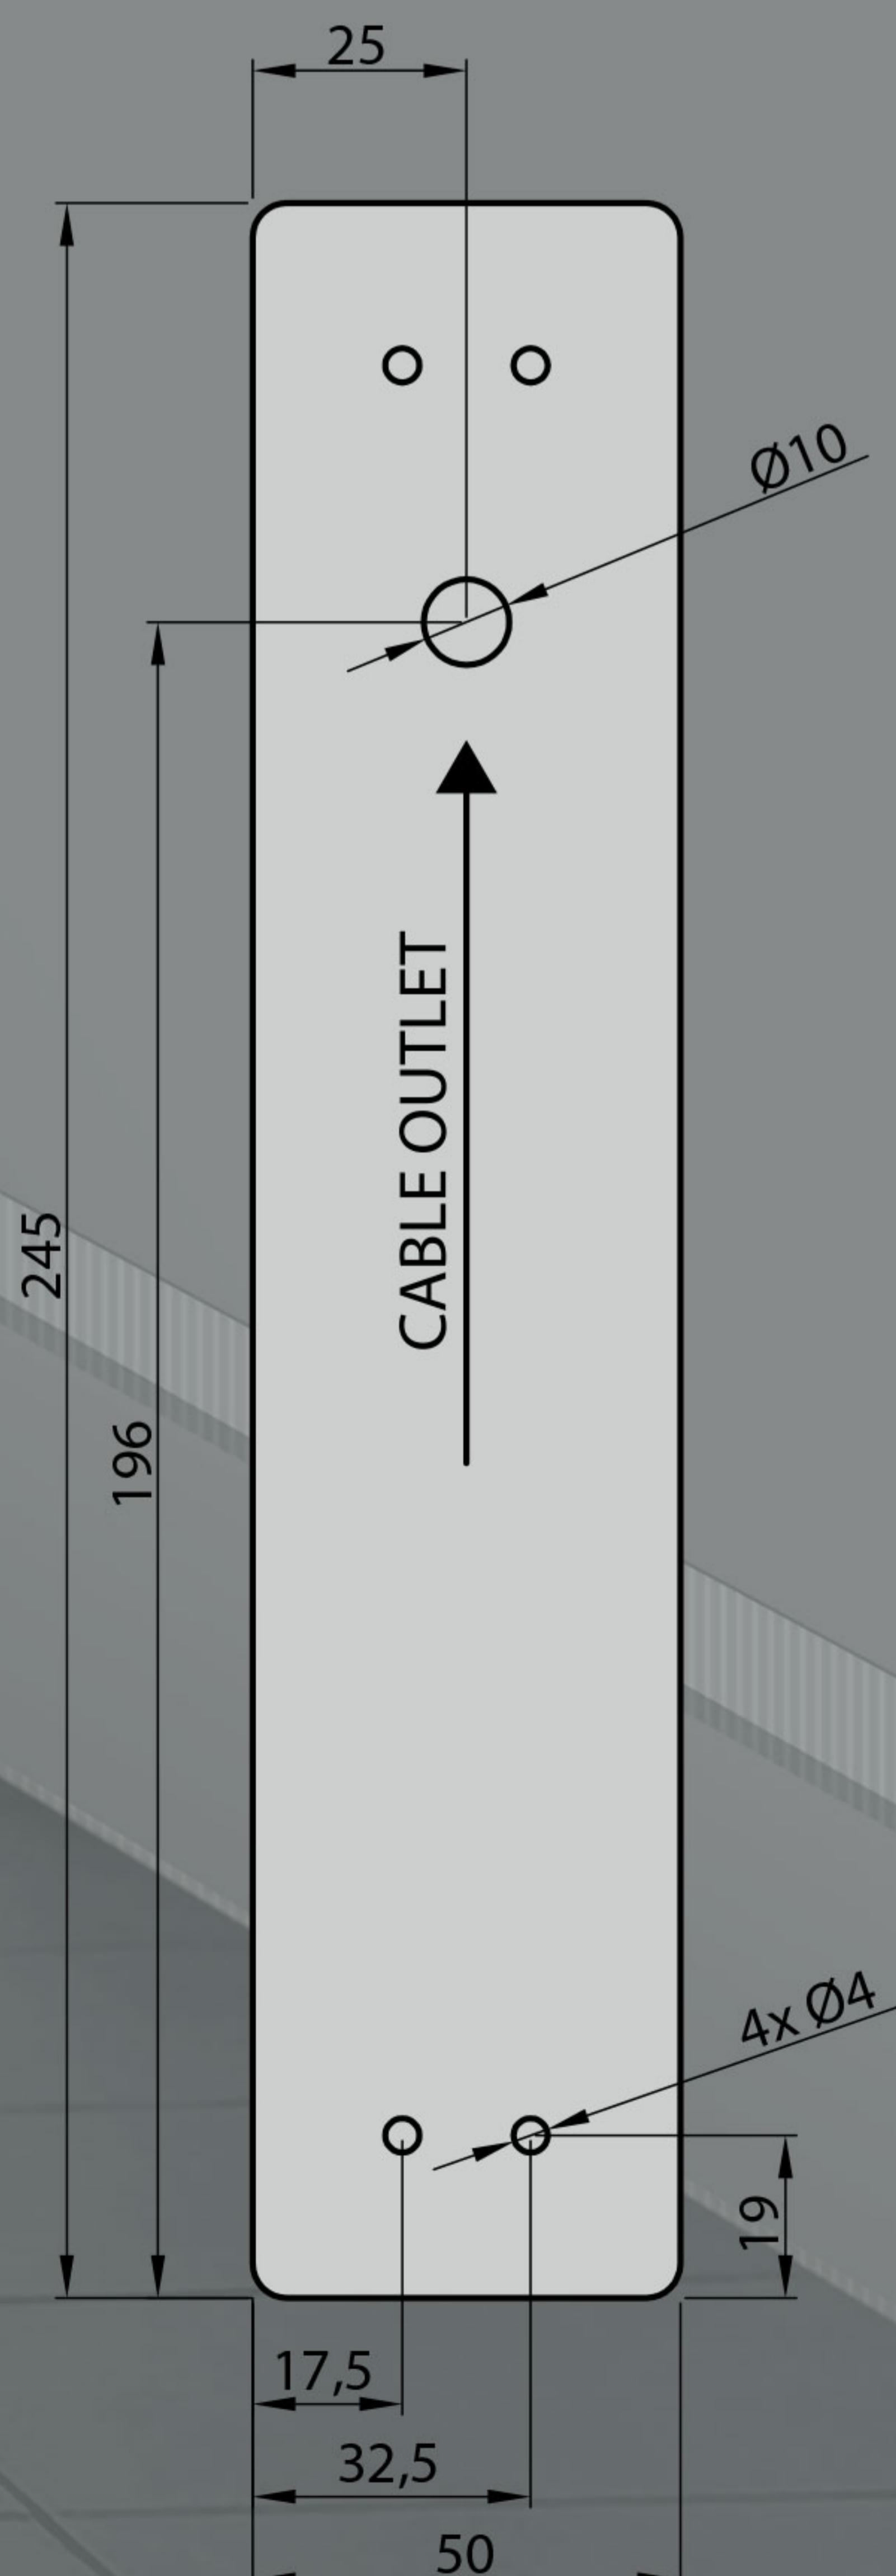

**NOTE**

For outdoor installation, drill a 3 mm hole in the bottom endcap to drain out any moisture.