

**Dimension**

H: 400 mm

W: 80 mm

D: 23 mm

Microswitches 2 pc NO


IP class: IP67

Nominal rated current from:

0,1 A - 10 A/250 V AC

Lowest rated current 1mA/4 V DC

**Hole pattern:**

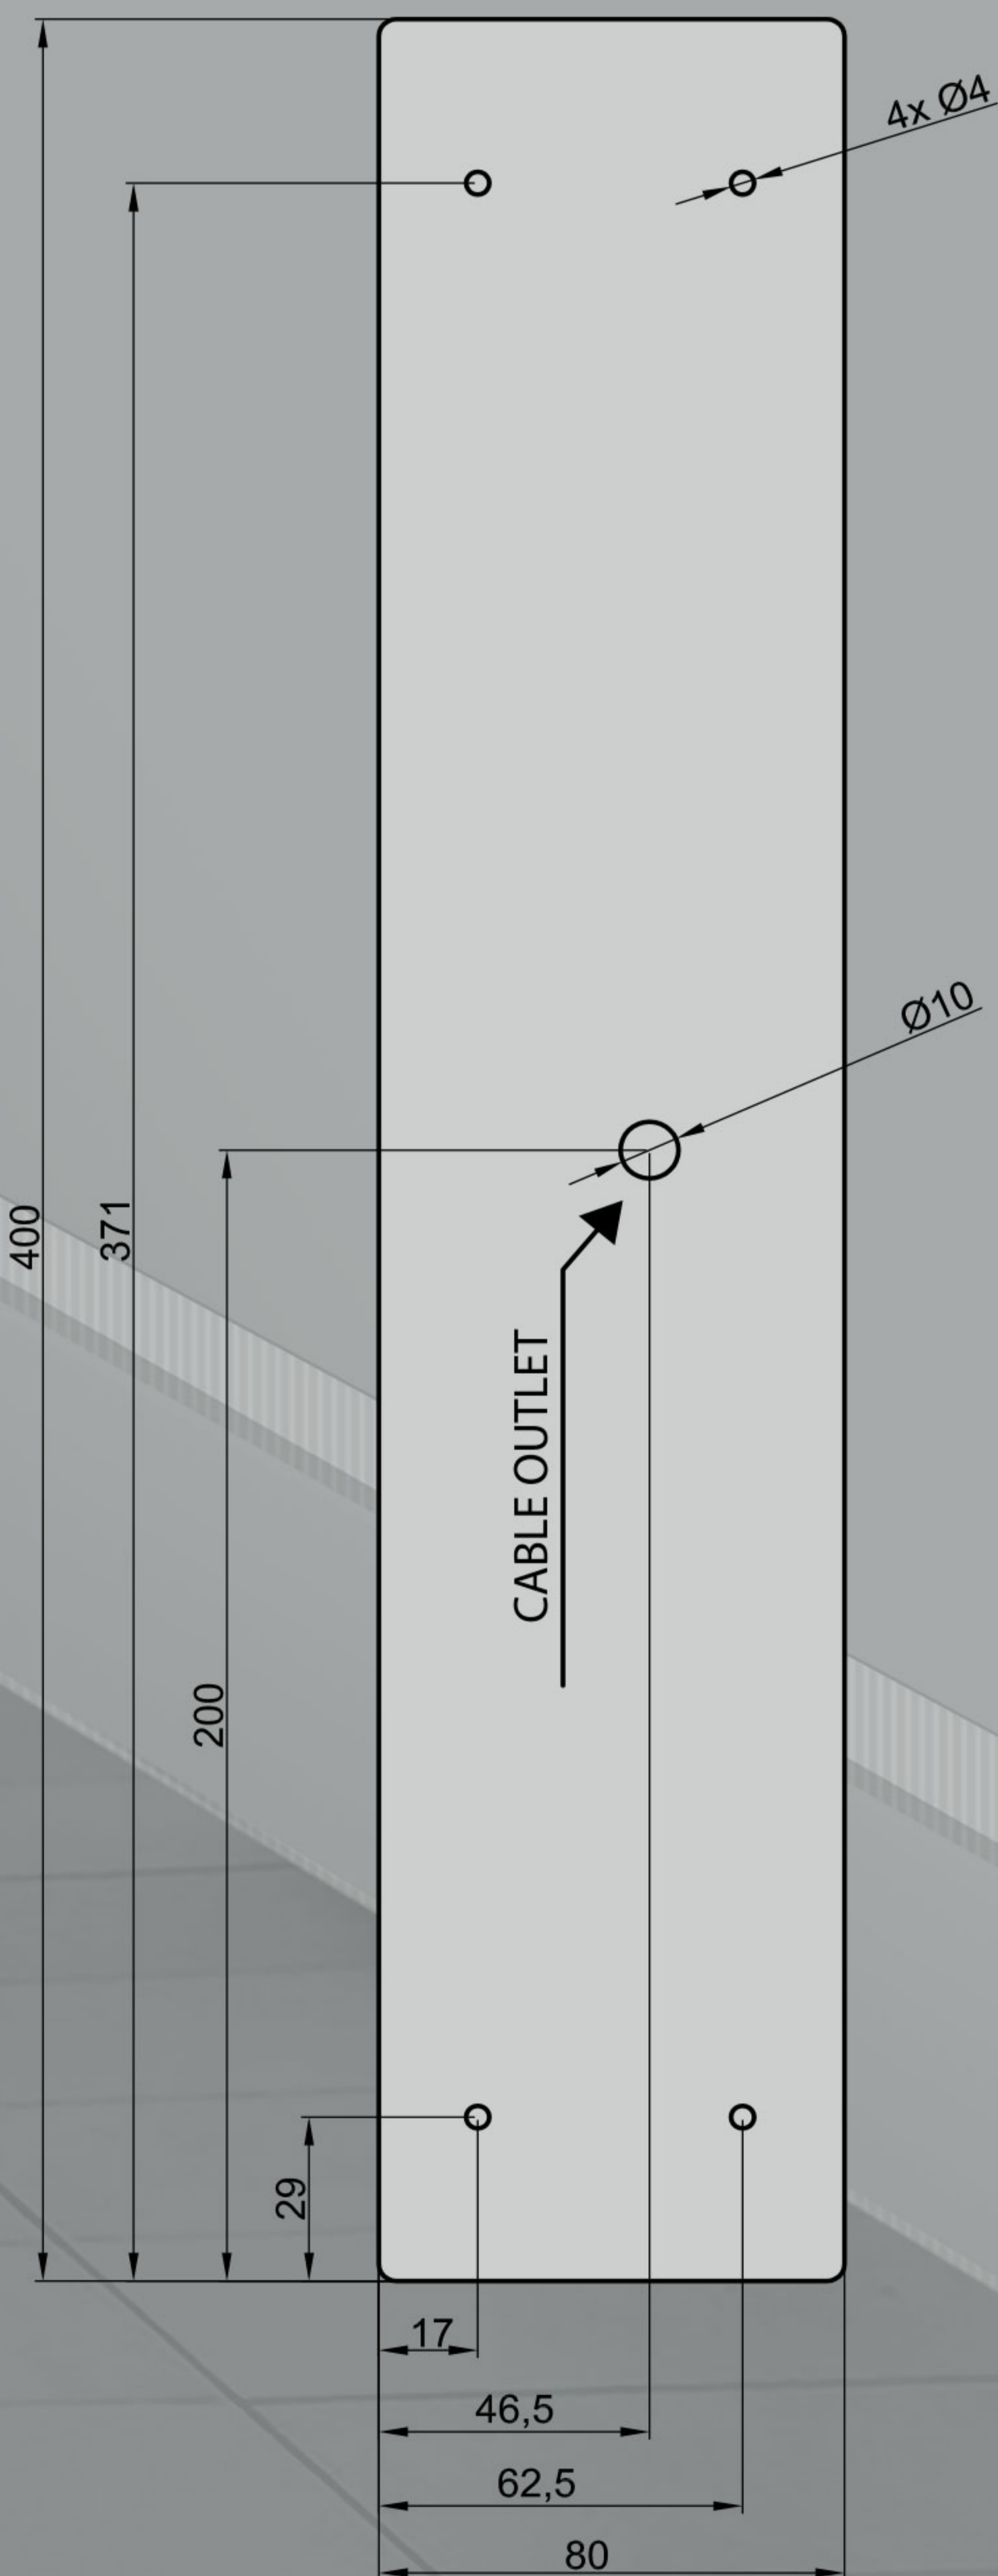

*Material:*

*Alu.6060-T6*

*POM Plastic (Acetal)*

*Cleaning:*

*The elbow switch can be cleaned with all commonly used detergents.*

**Optional:**

Can be ordered with:

\* Microswitch with Change over functionality, NO/NC

\* Radio transmitter for wireless installation

\* Control unit with 2 relays

\* Universal symbols:

1. Door



2. Wheelchair



3. Lift



\* Contrast lines



**NOTE**

For outdoor installation, drill a 3 mm hole in the bottom endcap to drain out any moisture.