

**Dimension**

H: 245 mm  
W: 80 mm  
D: 23 mm

Microswitch 1 pc NO  
IP class: IP67  
Nominal rated current from:  
0,1 A - 10 A/250 V AC  
Lowest rated current  
1mA/4 V DC

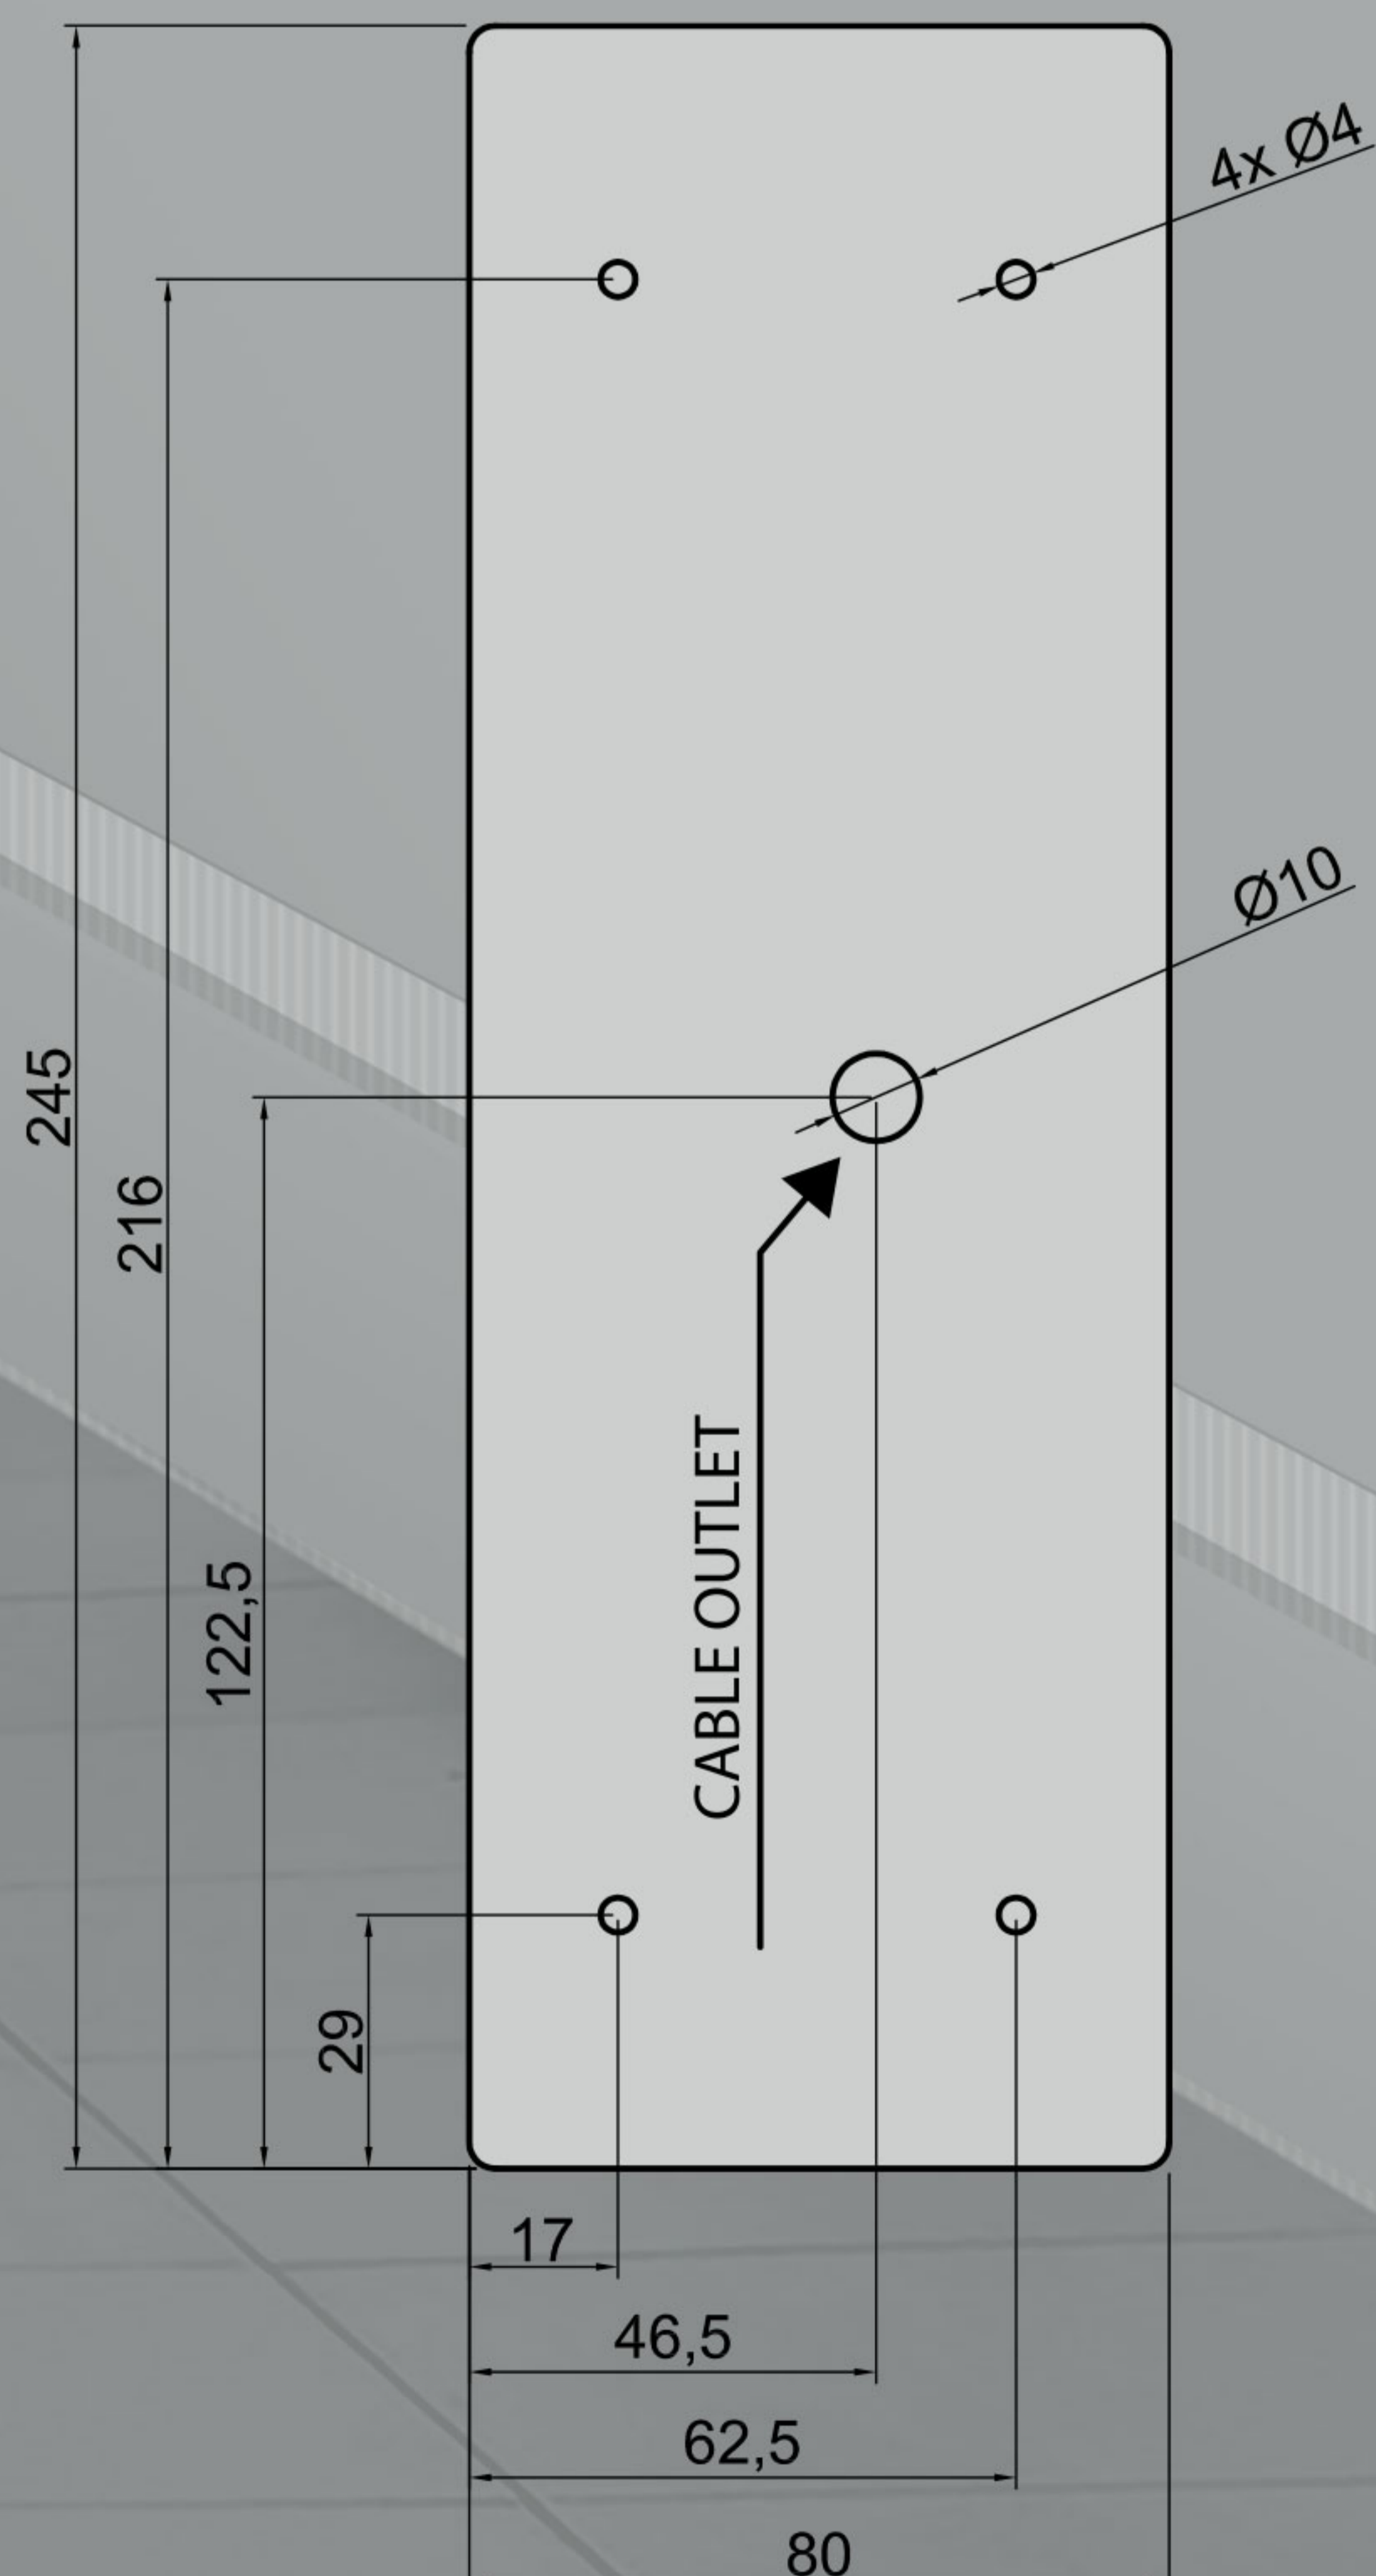






*Material:*  
Alu.6060-T6  
POM Plastic (Acetal)  
Evaluated by SundaHus: A

*Cleaning:*  
The elbow switch can be cleaned with all commonly used detergents.

**Optional:**  
Can be ordered with:  
\* 2 Microswitches  
\* Microswitch with Change over functionality, NO/NC  
\* Radio transmitter for wireless installation  
\* Control unit with 2 relays  
\* Universal symbols:

**Hole pattern:**



- 1. Door 
- 2. Wheelchair 
- 3. Lift 
- \* Contrast lines 

**NOTE**

For outdoor installation, drill a 3 mm hole in the bottom endcap to drain out any moisture.