


Assembly and installation.

1. Disassemble the lower endcap by screwing out both of the lower screws.
2. Slide out the aluminum lid.
3. Connect the electric wiring (12-24 V) to the connection terminals.
4. Fixate the aluminum core with assembly screws and washers.
5. Slide in the aluminum lid
6. Assemble and screw the lower endcap.

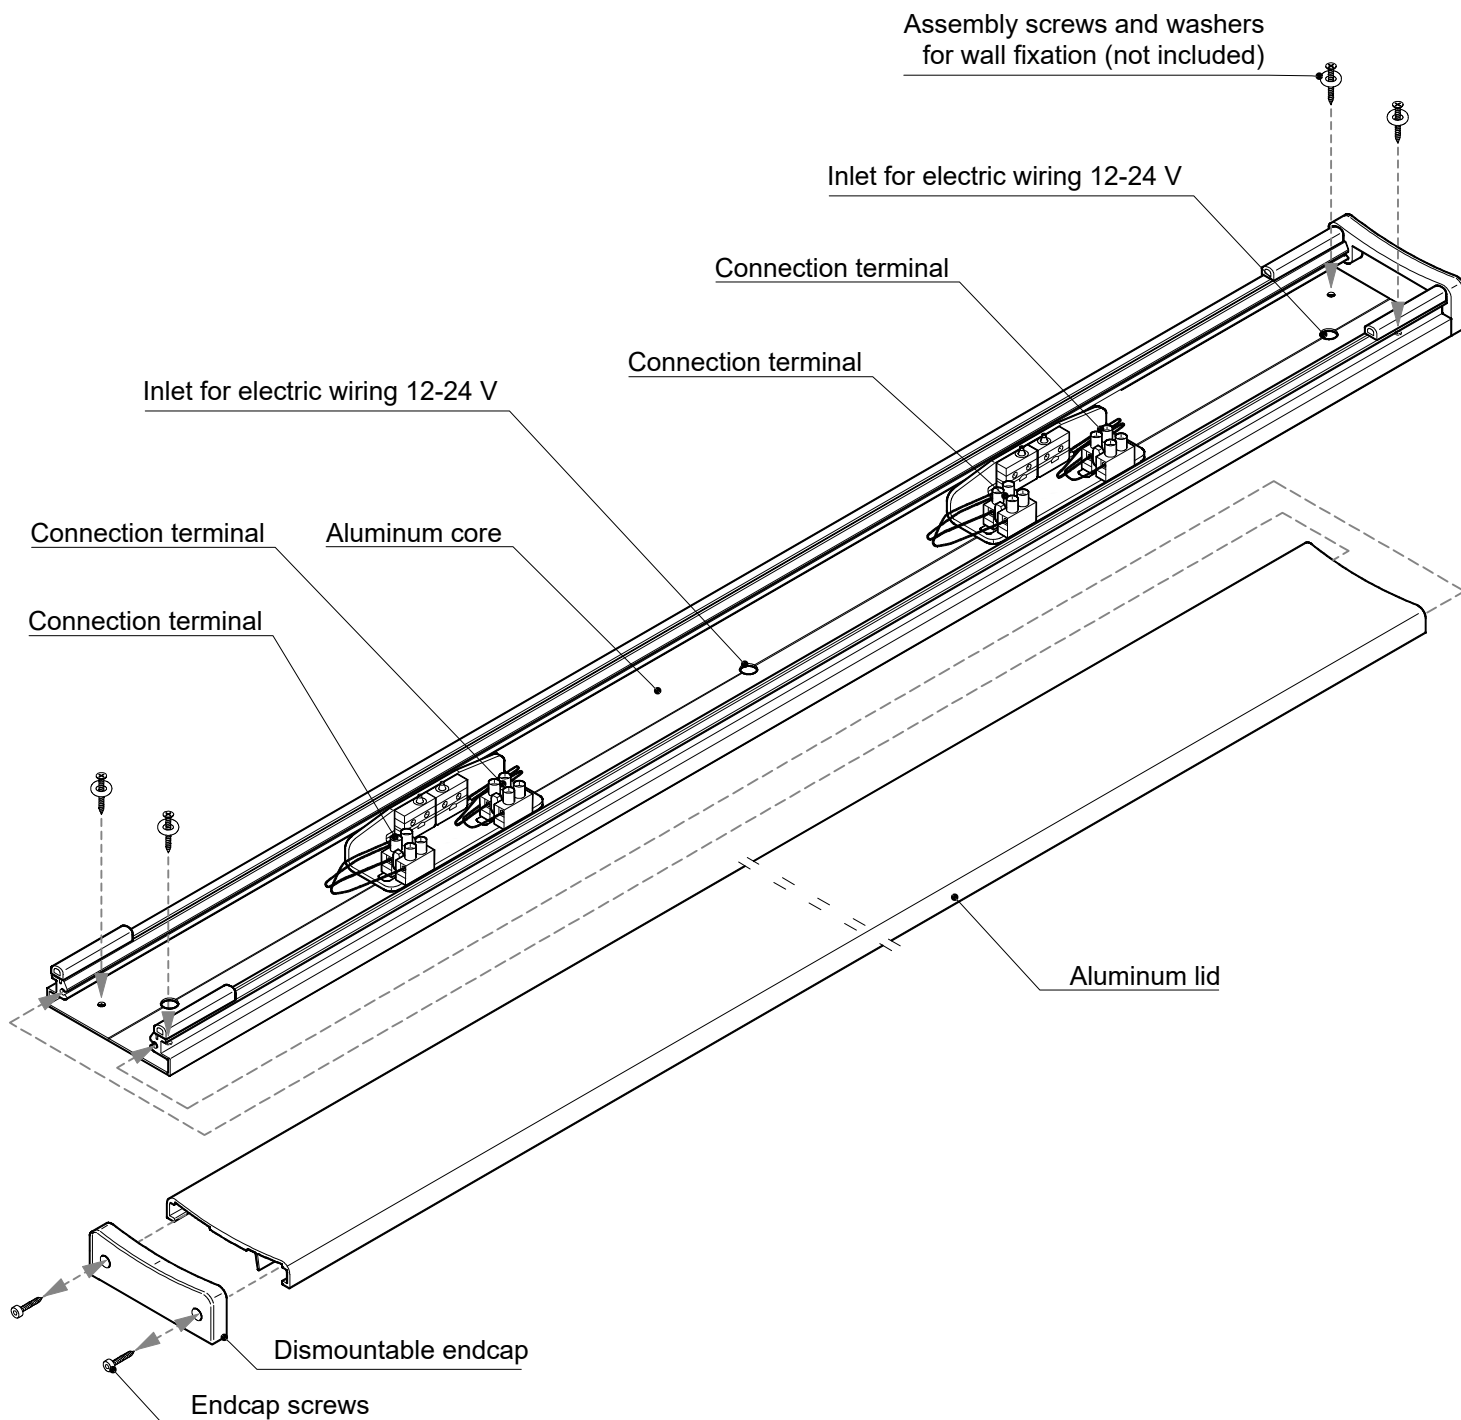

Click [here](#) to go to the product JCK118.900